# **PolyPhaser**

Type N F/M Coaxial RF Surge Protector, 800MHz - 2.5GHz, 300W, IP67, 6 V Max., 175uJ, 20kA, Hybrid, Bracket Up, Hole Mount



### DGXZ+06NFNM-B

#### **Features**

- · Surge current of 20kA
- Max Power 300W
- Frequency range from 800 MHz to 2.5GHz
- N Female to N Male connectors
- · Waterproof IP67 rated

# **Applications**

- WiFi
- GPS

- DC Pass
- VSWR <1.1:1</li>
- · Low insertion loss
- · CE & RoHS compliant
- Directional
- · Land mobile radio
- · Cellular communications systems

### Description

RF surge protector (also known as lightning arrester or surge arrestor) DGXZ+06NFNM-B from PolyPhaser, utilizing a patented hybrid protection technology integrating a silicon avalanche suppression diode (SASD), a Metal Oxide Varistor (MOV) and a gas tube (GT or GDT). This RF surge protector component is manufactured in a coaxial in-line design with wide operating frequency range. All PolyPhaser RF surge protector products are available in stock with same day shipping.

# **Electrical Specifications**

Surge Protector Type DC Handling

Hybrid DC Pass

Description	Minimum	Typical	Maximum	Units
Frequency Range	0.8		2.5	GHz
Impedance		50		Ohms
VSWR			1.1:1	
Insertion Loss			0.1	dB
Operating Voltage (DC)			6	Volts
Input Power, CW			300	Watts
Surge Current			20	kA
IEC 61000-4-5 8/20µs wave	form			
Turn On Voltage		6.5		Volts
Throughput Energy			175	uJ
for 3kA, 8/20µs waveform				

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Type N F/M Coaxial RF Surge Protector, 800MHz - 2.5GHz, 300W, IP67, 6 V Max., 175uJ, 20kA, Hybrid, Bracket Up, Hole Mount DGXZ+06NFNM-B

# **PolyPhaser**

Type N F/M Coaxial RF Surge Protector, 800MHz - 2.5GHz, 300W, IP67, 6 V Max., 175uJ, 20kA, Hybrid, Bracket Up, Hole Mount



### DGXZ+06NFNM-B

# **Mechanical Specifications**

Weight 1 lbs [453.59 g]

Configuration

Input Connector N Female Output Connector N Male

# **Environmental Specifications**

**Temperature** 

Operating Range -50 to 85 deg C Storage Range -50 to +85 deg C


Ingress Protection (IP) Rating IP67 Humidity 95%

Compliance Certifications (see product page for current document)

# **Plotted and Other Data**

Notes:

### **Typical Performance Data**

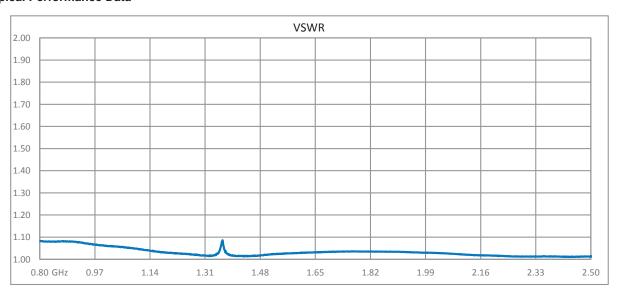


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Type N F/M Coaxial RF Surge Protector, 800MHz - 2.5GHz, 300W, IP67, 6 V Max., 175uJ, 20kA, Hybrid, Bracket Up, Hole Mount DGXZ+06NFNM-B

# **PolyPhaser**

Type N F/M Coaxial RF Surge Protector, 800MHz - 2.5GHz, 300W, IP67, 6 V Max., 175uJ, 20kA, Hybrid, Bracket Up, Hole Mount



#### DGXZ+06NFNM-B

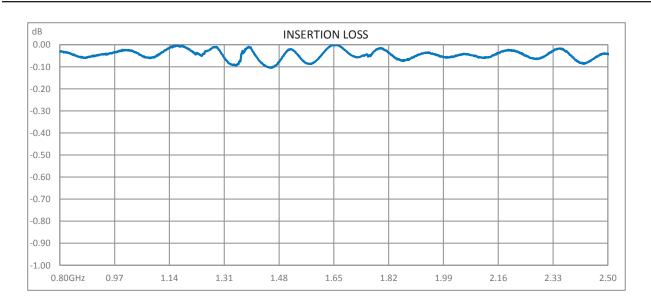

PolyPhaser protects and increases the reliability of global RF communications networks, including transportation, telecommunications, defense, security and industrial applications, with superior RF surge protection technologies including DC Block, DC Pass and Ultra Low PIM. Backed by responsive service and expert technical support PolyPhaser continually expands its product offering and services to serve engineers' urgent needs for RF components in mission critical communication networks.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Type N F/M Coaxial RF Surge Protector, 800MHz - 2.5GHz, 300W, IP67, 6 V Max., 175uJ, 20kA, Hybrid, Bracket Up, Hole Mount DGXZ+06NFNM-B

URL: https://www.polyphaser.com/type-n-surge-protector-2.5ghz-hybrid-dgxz-06nfnm-b

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. PolyPhaser reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. PolyPhaser does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and PolyPhaser does not assume any liability arising out of the use of any part or documentation.

### **DGXZ+06NFNM-B CAD Drawing**

