PolyPhaser

Type N F/M Bulkhead Coaxial RF Surge Protector, 2GHz - 6GHz, DC Block, 10W, IP67, .5uJ, 10kA, Filter



AL-LSXM-ME

Features

- · Surge current up to 10kA
- Max Power 10W
- Frequency range from 2GHz to 6GHz
- N Female to N Male connectors
- · Waterproof IP67 rated

- DC Block
- VSWR <1.3:1
- Multi-strike capability
- · CE & RoHS compliant

Applications

WiFi

Cellular communication systems

Description

RF surge protector (also known as lightning arrester) AL-LSXM-ME from PolyPhaser utilizing a patented DC shorted filter design enables an almost instantaneous response to a lightning surge to protect critical hardware while maintaining the RF performance. This RF surge protector component is manufactured in a coaxial in-line design with wide operating frequency range. All PolyPhaser RF surge protector products are available in stock with same day shipping.

Electrical Specifications

Surge Protector Type DC Handling

Surge Filter DC Block

Description	Minimum	Typical	Maximum	Units
Frequency Range	2		6	GHz
Impedance		50		Ohms
VSWR		1.2:1	1.3:1	
Return Loss		20		dB
Insertion Loss		0.1	0.2	dB
Input Power, CW			10	Watts
Surge Current			10	kA
IEC 61000-4-5 8/20µs W	AVEFORM			
Throughput Energy			500	nJ
FOR 3kA @8/20µs WAVE	EFORM			

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Type N F/M Bulkhead Coaxial RF Surge Protector, 2GHz - 6GHz, DC Block, 10W, IP67, .5uJ, 10kA, Filter AL-LSXM-ME

PolyPhaser

Type N F/M Bulkhead Coaxial RF Surge Protector, 2GHz - 6GHz, DC Block, 10W, IP67, .5uJ, 10kA, Filter



AL-LSXM-ME

Mechanical Specifications

Size

 Length
 2.81 in [71.37 mm]

 Width/Diameter
 0.81 in [20.57 mm]

Configuration

Input Connector N Female Output Connector N Male

Environmental Specifications

Temperature

Operating Range -40 to 85 deg C

Ingress Protection (IP) Rating IP67


Vibration 1G @ 5Hz to 100Hz

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Typical Performance Data

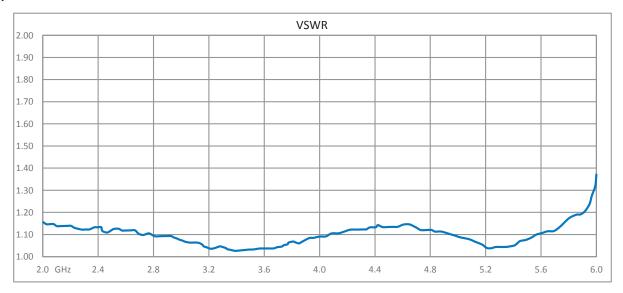


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Type N F/M Bulkhead Coaxial RF Surge Protector, 2GHz - 6GHz, DC Block, 10W, IP67, .5uJ, 10kA, Filter AL-LSXM-ME

PolyPhaser

Type N F/M Bulkhead Coaxial RF Surge Protector, 2GHz - 6GHz, DC Block, 10W, IP67, .5uJ, 10kA, Filter



AL-LSXM-ME

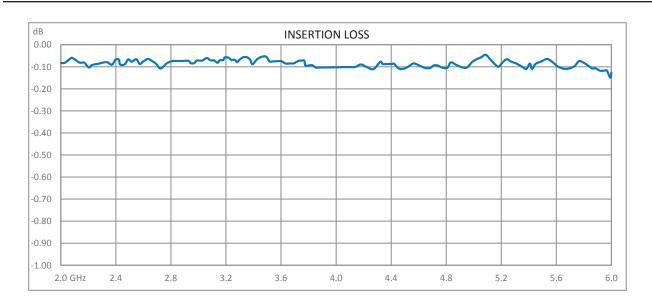

PolyPhaser protects and increases the reliability of global RF communications networks, including transportation, telecommunications, defense, security and industrial applications, with superior RF surge protection technologies including DC Block, DC Pass and Ultra Low PIM. Backed by responsive service and expert technical support PolyPhaser continually expands its product offering and services to serve engineers' urgent needs for RF components in mission critical communication networks.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Type N F/M Bulkhead Coaxial RF Surge Protector, 2GHz - 6GHz, DC Block, 10W, IP67, .5uJ, 10kA, Filter AL-LSXM-ME

URL: https://www.polyphaser.com/type-n-surge-protector-6ghz-filter-al-lsxm-me

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. PolyPhaser reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. PolyPhaser does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and PolyPhaser does not assume any liability arising out of the use of any part or documentation.

AL-LSXM-ME CAD Drawing

