NOTICE OF PROPRIETARY RIGHTS

THIS DOCUMENT CONTAINS CONFIDENTIAL TECHNICAL DATA, INCLUDING TRADE SECRETS, PROPRIETARY TO TIMES MICROWAVE SYTEMS. DISCLOSURE OF THIS DATA IS EXPRESSLY CONDITIONED UPON YOUR ASSENT THAT ITS USE IS LIMITED TO USE WITHIN YOUR COMPANY ONLY. ANY OTHER USE IS STRICTLY PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF TIMES MICROWAVE SYSTEMS.

REV.	REVISION DESCRIPTION	DFTM	DATE	APPD	DATE
A	RELEASED FOR PRODUCTION	M.E.	03/24/14	M.E.	03/24/14

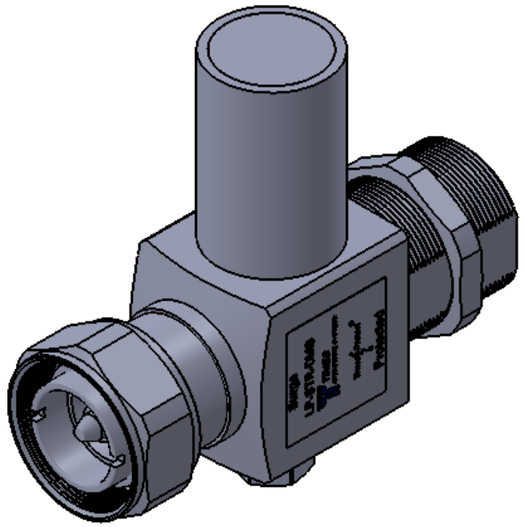

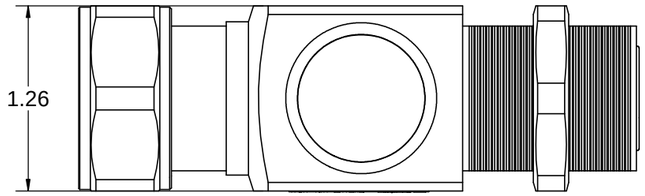

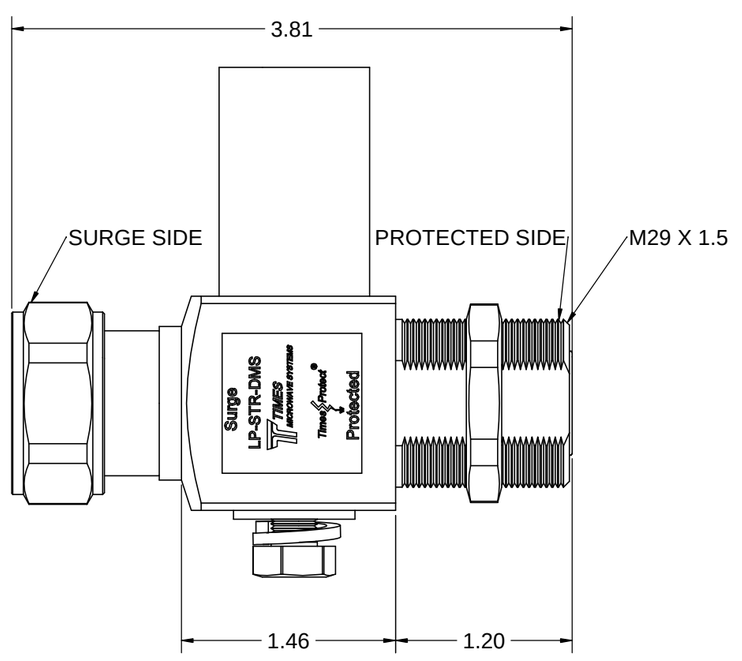

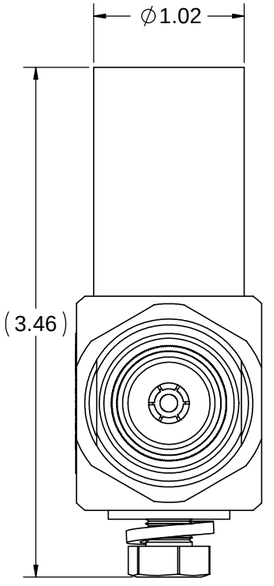

NOTES:

1. ELECTRICAL PERFORMANCE

   IMPEDANCE: 50 OHMS
   OPERATING FREQUENCY: 800-2500 MHz
   VSWR/RETURN LOSS: < 1.13:1 / < -24 dB (800-840 MHz)
   < 1.1:1 / < -26 dB (840-2500 MHz)
   INSERTION LOSS: < 0.1 dB
   AVERAGE POWER: 700 W
   PIM: < -160 dBc
   MAX SURGE CURRENT: 50 kA (8/20 us WAVE-FORM)
   RESIDUAL PULSE VOLTAGE: < 100 V (50kA 8/20 us WAVE-FORM)
   RESIDUAL PULSE VOLATGE: < 1 V (4kV/2kA 1.2X50/8X20us WAVE-FORM)
   ENERGY THROUGHPUT RATING: < 1 nJ
   PROTECTION CIRCUIT: DC BLOCKED

2. ENVIRONMENTAL CHARACTERISTICS

   STORAGE/OPERATING TEMPERATURE: -40C TO +85C
   WEATHERIZATION: IP67
   VIBRATION: MIL-STD 202, METHOD 204, CONDITION B
   RoHS COMPLIANT

3. MATERIAL AND FINISH

   INNER CONNECTOR MALE: BRASS, SILVER PLATE
   INNER CONNECTOR FEMALE: PHOSPHOR BRONZE, SILVER PLATE
   BODY: BRASS, WHITE BRONZE PLATE
   COUPLING NUT: BRASS, WHITE BRONZE PLATE
   INSULATOR: PTFE
   O-RING: SILICONE RUBBER

MATERIAL:

USED ON ASSY.

DRAFTSMAN	M. ELLIS	03/24/14
CHECKER	M. ELLIS	03/24/14
APPROVED	M. ELLIS	03/24/14

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE IN INCHES
MACHINED SURFACES FINISH 32 RMS MAX.
REMOVE ALL BURRS .005 MAX. BREAK
MACHINE CORNERS .005 MAX. FILLET R.
TOLERANCES ON DECIMALS
.XX ± .01 .XXX ± .005
ANGLES ± 1° FRACTIONS ± 1/32

DO NOT SCALE DRAWING

TIMES MICROWAVE SYSTEMS

TITLE: SURGE PROTECTOR
DIN MALE TO DIN FEMALE
800-2500 MHz

DWG. SIZE	DRWG. NO.	REV.
C	LP-STR-DMS	A
CODE IDENT. 68999 00779	SCALE: 1.5:1	SHEET 1 OF 1