

Type N F/M Bulkhead Coaxial RF Surge Protector, 698MHz - 2.7GHz, DC Block, 500W, IP67, .005uJ, 40kA, Filter, Low PIM -155 dBc, Hole Mount



TSX-NFM-P

Features

- Surge current of 40kA
- Max Power 500W
- Frequency range from 698 MHz to 2700 MHz
- Waterproof IP67 rated
- N Female to N Male connectors
- DC Block
- VSWR <1.1:1
- Low insertion loss
- CE & RoHS compliant
- Bidirectional

Applications

- Cellular communication systems
- Public safety systems
- Emergency response systems
- Industrial Communications

Description

RF surge protector (also known as lightning arrester) TSX-NFM-P from PolyPhaser utilizing a patented spiral inductor design enables an almost instantaneous response to a lightning surge to protect critical hardware while maintaining the RF performance. This RF surge protector component is manufactured in a coaxial in-line design with wide operating frequency range. All PolyPhaser RF surge protector products are available in stock with same day shipping.

Electrical Specifications

Description	Surge Protector Type DC Handling		Surge Filter DC Block	
	Minimum	Typical	Maximum	Units
Frequency Range	0.698		2.7	GHz
Impedance		50		Ohms
VSWR			1.1:1	
Insertion Loss			0.1	dB
Passive Intermodulation			-155	dBc
Input Power, CW			500	Watts
500W @ 920MHz				
750W @ 50°C				
Surge Current			40	kA
IEC 61000-4-5 8/20µs WAVEFORM				
Throughput Energy			5	nJ
FOR 3kA @ 8/20µs WAVEFORM				

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[Type N F/M Bulkhead Coaxial RF Surge Protector, 698MHz - 2.7GHz, DC Block, 500W, IP67, .005uJ, 40kA, Filter, Low PIM -155 dBc, Hole Mount TSX-NFM-P](#)



Type N F/M Bulkhead Coaxial RF Surge Protector, 698MHz - 2.7GHz, DC Block, 500W, IP67, .005uJ, 40kA, Filter, Low PIM -155 dBc, Hole Mount



TSX-NFM-P

Mechanical Specifications

Size

Length	3.3 in [83.82 mm]
Width/Diameter	1.18 in [29.97 mm]
Weight	0.55 lbs [249.48 g]

Configuration

Input Connector	N Female
Output Connector	N Male

Environmental Specifications

Temperature

Operating Range	-50 to 85 deg C
Ingress Protection (IP) Rating	IP67
Vibration	1G @ 5Hz to 100Hz

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[Type N F/M Bulkhead Coaxial RF Surge Protector, 698MHz - 2.7GHz, DC Block, 500W, IP67, .005uJ, 40kA, Filter, Low PIM -155 dBc, Hole Mount TSX-NFM-P](#)




Type N F/M Bulkhead Coaxial RF Surge Protector, 698MHz - 2.7GHz, DC Block, 500W, IP67, .005uJ, 40kA, Filter, Low PIM -155 dBc, Hole Mount



TSX-NFM-P

Typical Performance Data

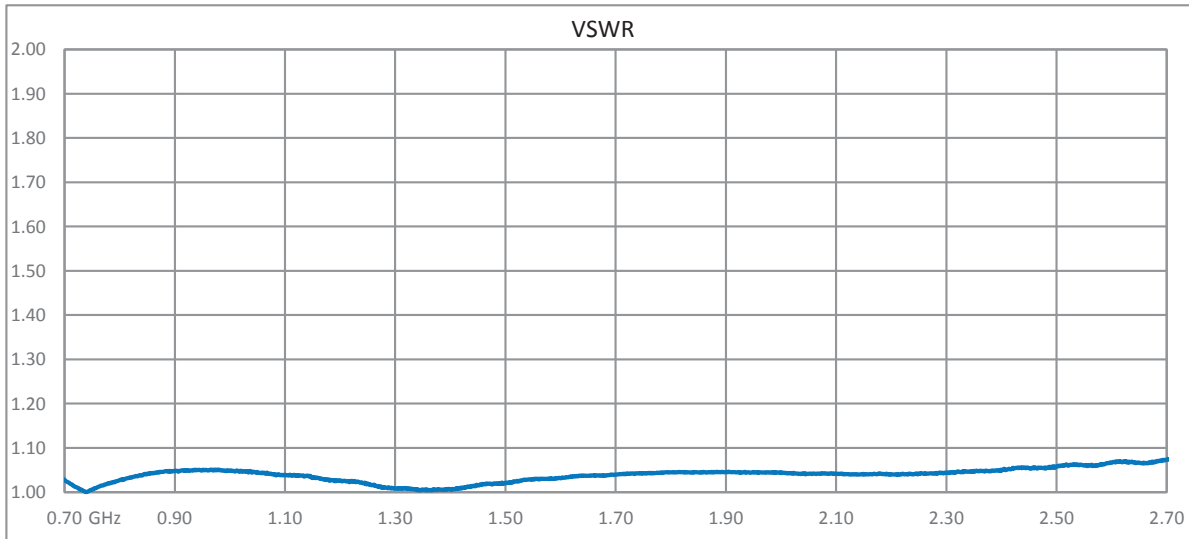


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[Type N F/M Bulkhead Coaxial RF Surge Protector, 698MHz - 2.7GHz, DC Block, 500W, IP67, .005uJ, 40kA, Filter, Low PIM -155 dBc, Hole Mount TSX-NFM-P](#)



Type N F/M Bulkhead Coaxial RF Surge Protector, 698MHz - 2.7GHz, DC Block, 500W, IP67, .005uJ, 40kA, Filter, Low PIM -155 dBc, Hole Mount



TSX-NFM-P

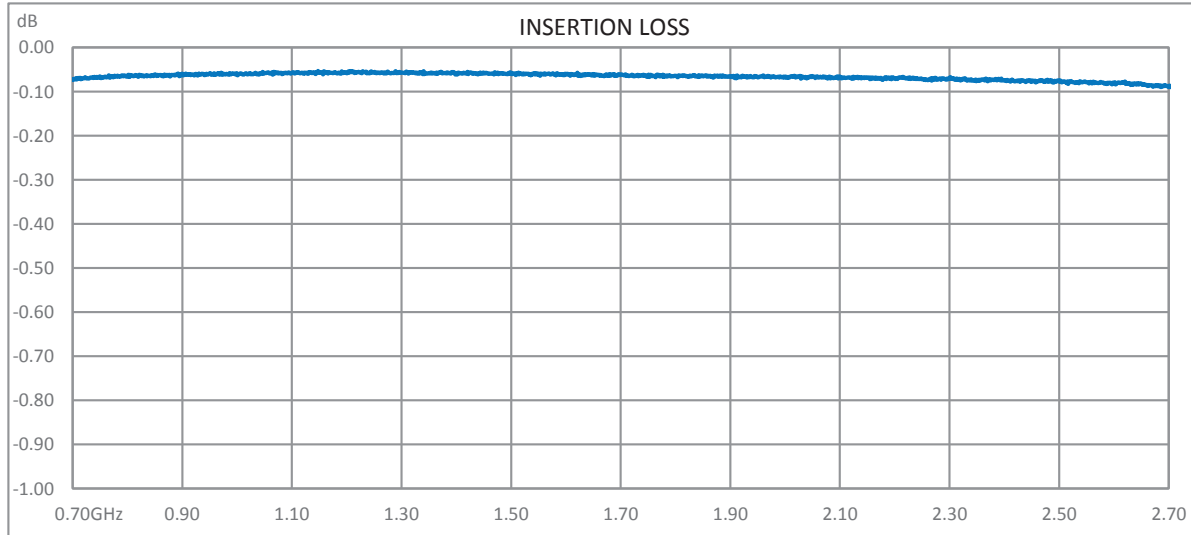

PolyPhaser protects and increases the reliability of global RF communications networks, including transportation, telecommunications, defense, security and industrial applications, with superior RF surge protection technologies including DC Block, DC Pass and Ultra Low PIM. Backed by responsive service and expert technical support PolyPhaser continually expands its product offering and services to serve engineers' urgent needs for RF components in mission critical communication networks.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Type N F/M Bulkhead Coaxial RF Surge Protector, 698MHz - 2.7GHz, DC Block, 500W, IP67, .005uJ, 40kA, Filter, Low PIM -155 dBc, Hole Mount TSX-NFM-P](#)

URL: <https://www.polyphaser.com/type-n-surge-protector-2.7ghz-filter-tsx-nfm-p>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. PolyPhaser reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. PolyPhaser does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and PolyPhaser does not assume any liability arising out of the use of any part or documentation.

Type N F/M Bulkhead Coaxial RF Surge Protector, 698MHz - 2.7GHz, DC Block, 500W, IP67, .005uJ, 40kA, Filter, Low PIM -155 dBc, Hole Mount

TSX-NFM-P CAD Drawing

