# **PolyPhaser**

Type N F/F Coaxial RF Surge Protector, 40MHz - 400MHz, 100W, IP67, -6 V Max., 2.5mJ, 20kA, Hybrid, Bracket Down, Hole Mount



#### **BGXZ-60NFNF-ALT**

### **Features**

- · Surge current of 20kA
- Max Power 100W
- Frequency range from 40 to 400 MHz
- N-type female connectors
- · Waterproof IP67 rated

- DC Pass
- VSWR <1.1:1</li>
- · Low insertion loss
- · CE & RoHS compliant

## **Applications**

· GPS systems

· Active antenna systems

### Description

RF surge protector (also known as lightning arrester or surge arrestor) BGXZ-60NFNF-ALT from PolyPhaser, utilizes a patented hybrid protection technology integrating a silicon avalanche suppression diode (SASD), a Metal Oxide Varistor (MOV) and a gas tube (GT or GDT). This RF surge protector component is manufactured in a coaxial in-line design with wide operating frequency range. All PolyPhaser RF surge protector products are available in stock with same day shipping.

## **Electrical Specifications**

Surge Protector Type DC Handling

Hybrid DC Pass

Description	Minimum	Typical	Maximum	Units
Frequency Range	40		400	MHz
Impedance		50		Ohms
VSWR			1.1:1	
Insertion Loss			0.25	dB
Operating Voltage (DC)			-6	Volts
Input Power, CW			100	Watts
Surge Current			20	kA
IEC 61000-4-5 8/20µs Wa	veform			
Turn On Voltage		66		Volts
Throughput Energy FOR 3kA @ 8/20µs WAVE	EFORM		2.5	mJ

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Type N F/F Coaxial RF Surge Protector, 40MHz - 400MHz, 100W, IP67, -6 V Max., 2.5mJ, 20kA, Hybrid, Bracket Down, Hole Mount BGXZ-60NFNF-ALT

# **PolyPhaser**

Type N F/F Coaxial RF Surge Protector, 40MHz - 400MHz, 100W, IP67, -6 V Max., 2.5mJ, 20kA, Hybrid, Bracket Down, Hole Mount



#### **BGXZ-60NFNF-ALT**

## **Mechanical Specifications**

Size

 Length
 3.65 in [92.71 mm]

 Width/Diameter
 1.74 in [44.2 mm]

 Weight
 1 lbs [453.59 g]

Configuration

Input Connector N Female Output Connector N Female

## **Environmental Specifications**

**Temperature** 

Operating Range -50 to 85 deg C


Ingress Protection (IP) Rating IP67 Humidity 95%

## Compliance Certifications (see product page for current document)

### **Plotted and Other Data**

Notes:

#### **Typical Performance Data**

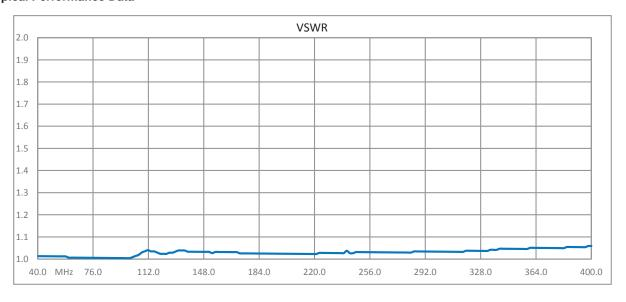


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Type N F/F Coaxial RF Surge Protector, 40MHz - 400MHz, 100W, IP67, -6 V Max., 2.5mJ, 20kA, Hybrid, Bracket Down, Hole Mount BGXZ-60NFNF-ALT

# **PolyPhaser**

Type N F/F Coaxial RF Surge Protector, 40MHz - 400MHz, 100W, IP67, -6 V Max., 2.5mJ, 20kA, Hybrid, Bracket Down, Hole Mount



#### **BGXZ-60NFNF-ALT**

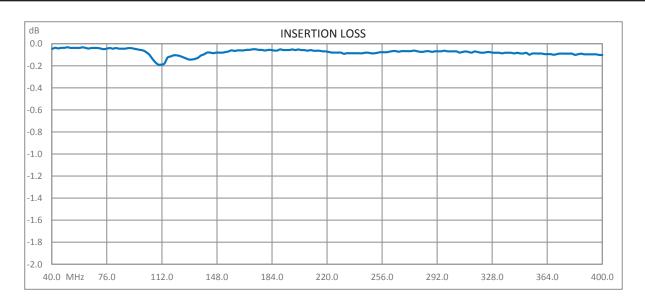

PolyPhaser protects and increases the reliability of global RF communications networks, including transportation, telecommunications, defense, security and industrial applications, with superior RF surge protection technologies including DC Block, DC Pass and Ultra Low PIM. Backed by responsive service and expert technical support PolyPhaser continually expands its product offering and services to serve engineers' urgent needs for RF components in mission critical communication networks.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Type N F/F Coaxial RF Surge Protector, 40MHz - 400MHz, 100W, IP67, -6 V Max., 2.5mJ, 20kA, Hybrid, Bracket Down, Hole Mount BGXZ-60NFNF-ALT

URL: https://www.polyphaser.com/type-n-surge-protector-400mhz-hybrid-bgxz-60nfnf-alt

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. PolyPhaser reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. PolyPhaser does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and PolyPhaser does not assume any liability arising out of the use of any part or documentation.

## **BGXZ-60NFNF-ALT CAD Drawing**

