

Type N F/F Coaxial RF Surge Protector, 400MHz - 1.2GHz, 300W, IP67, 36 V Max., 25uJ, 20kA, Hybrid, Bracket Down, Hole Mount



CGXJ+36NFNF-A

Features

- Surge current of 20kA
- Max Power 300W
- Frequency range from 400 MHz to 1.2 GHz
- Waterproof IP67 rated
- N-Type Female connectors
- DC Pass
- VSWR <1.1:1
- Low insertion loss
- CE & RoHS compliant
- Directional

Applications

- WiFi
- GPS
- Land mobile radio

Description

RF surge protector (also known as lightning arrester or surge arrester) CGXJ+36NFNF-A from PolyPhaser, utilizing a patented hybrid protection technology integrating a silicon avalanche suppression diode (SASD), a Metal Oxide Varistor (MOV) and a gas tube (GT or GDT). This RF surge protector component is manufactured in a coaxial in-line design with wide operating frequency range. All PolyPhaser RF surge protector products are available in stock with same day shipping.

Electrical Specifications

Surge Protector Type
DC Handling

Hybrid
DC Pass

Description	Minimum	Typical	Maximum	Units
Frequency Range	0.4		1.2	GHz
Impedance		50		Ohms
VSWR			1.1:1	
Insertion Loss			0.1	dB
Operating Voltage (DC)			36	Volts
Input Power, CW			300	Watts
Surge Current IEC 61000-4-5 8/20µs waveform			20	kA
Turn On Voltage		40		Volts
Throughput Energy for 3kA, 8/20µs waveform			25	uJ

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[Type N F/F Coaxial RF Surge Protector, 400MHz - 1.2GHz, 300W, IP67, 36 V Max., 25uJ, 20kA, Hybrid, Bracket Down, Hole Mount CGXJ+36NFNF-A](#)



Type N F/F Coaxial RF Surge Protector, 400MHz - 1.2GHz, 300W, IP67, 36 V Max., 25uJ, 20kA, Hybrid, Bracket Down, Hole Mount



CGXJ+36NFNF-A

Mechanical Specifications

Size

Length	3.65 in [92.71 mm]
Width/Diameter	2.82 in [71.63 mm]
Height	1.4 in [35.56 mm]
Weight	1 lbs [453.59 g]

Configuration

Input Connector	N Female
Output Connector	N Female

Environmental Specifications

Temperature

Operating Range	-50 to 85 deg C
Storage Range	-50 to +85 deg C

Ingress Protection (IP) Rating	IP67
Humidity	95%
Vibration	1G at 5Hz to 100Hz

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[Type N F/F Coaxial RF Surge Protector, 400MHz - 1.2GHz, 300W, IP67, 36 V Max., 25uJ, 20kA, Hybrid, Bracket Down, Hole Mount CGXJ+36NFNF-A](#)




Type N F/F Coaxial RF Surge Protector, 400MHz - 1.2GHz, 300W, IP67, 36 V Max., 25uJ, 20kA, Hybrid, Bracket Down, Hole Mount



CGXJ+36NFNF-A

Typical Performance Data

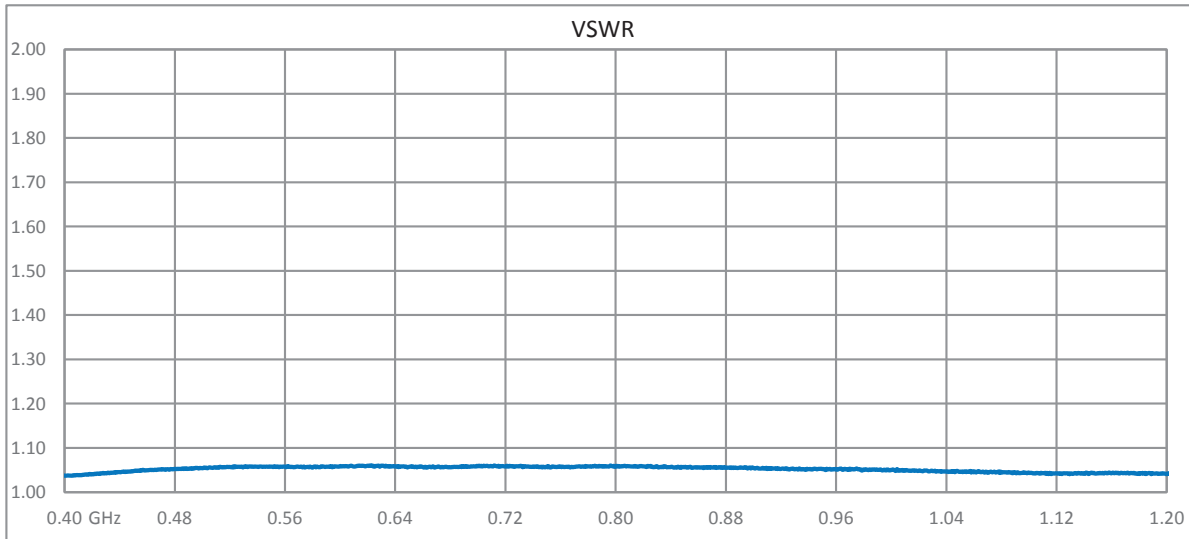


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[Type N F/F Coaxial RF Surge Protector, 400MHz - 1.2GHz, 300W, IP67, 36 V Max., 25uJ, 20kA, Hybrid, Bracket Down, Hole Mount CGXJ+36NFNF-A](#)



Type N F/F Coaxial RF Surge Protector, 400MHz - 1.2GHz, 300W, IP67, 36 V Max., 25uJ, 20kA, Hybrid, Bracket Down, Hole Mount



CGXJ+36NFNF-A

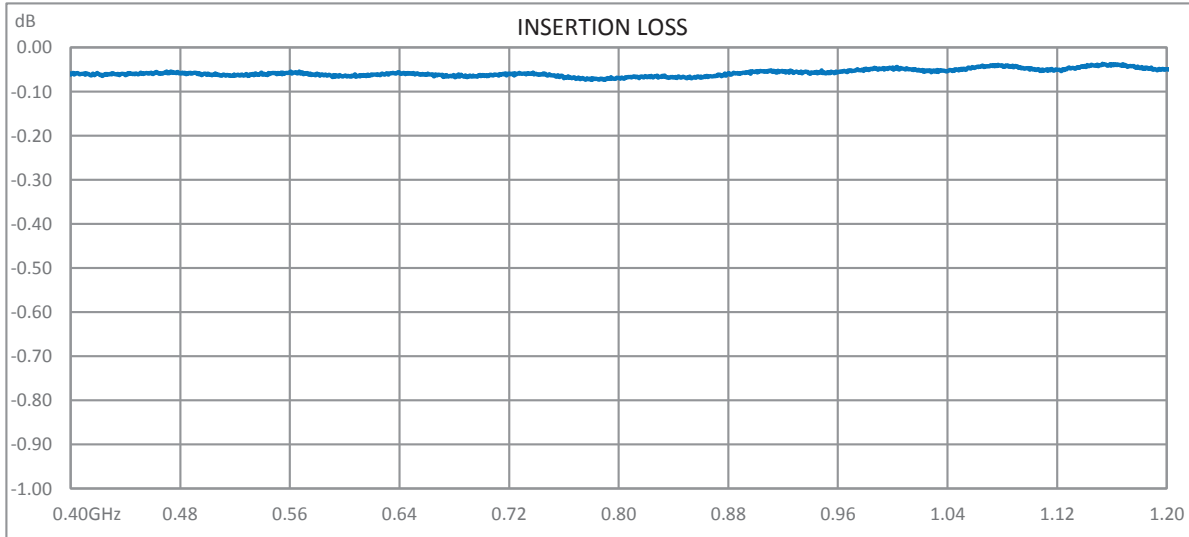

PolyPhaser protects and increases the reliability of global RF communications networks, including transportation, telecommunications, defense, security and industrial applications, with superior RF surge protection technologies including DC Block, DC Pass and Ultra Low PIM. Backed by responsive service and expert technical support PolyPhaser continually expands its product offering and services to serve engineers' urgent needs for RF components in mission critical communication networks.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Type N F/F Coaxial RF Surge Protector, 400MHz - 1.2GHz, 300W, IP67, 36 V Max., 25uJ, 20kA, Hybrid, Bracket Down, Hole Mount CGXJ+36NFNF-A](#)

URL: <https://www.polyphaser.com/type-n-surge-protector-1.2ghz-hybrid-cgxj-36nfnf-a>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. PolyPhaser reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. PolyPhaser does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and PolyPhaser does not assume any liability arising out of the use of any part or documentation.

Type N F/F Coaxial RF Surge Protector, 400MHz - 1.2GHz, 300W, IP67,
36 V Max., 25uJ, 20kA, Hybrid, Bracket Down, Hole Mount

CGXJ+36NFNF-A CAD Drawing

2X N FEMALE

DC PORT SMA

M8 X 1.25-6H NUT

2X .31 [8]

.83 [21.2]

3.65 [92.7]

2X .25 [6.4]

.68 [17.3]

1.67 [42.4]

.63 [15.9]

1.50 [38.1]

1.42 [35.9]

2.53 [64.1]

2.83 [71.9]

HARDWARE KIT INCLUDES:

QTY	DESCRIPTION
1	NUT 5/8-24 303 HEX SS
1	WASHER 5/8 410 SS
1	SILICONE O-RING 019
1	SCREW CAP M8X1.25X10MM
1	WASHER 5/16 EXT 18-8 SS

ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

FRACTIONS: ±. .XX ±. .03

ANGLES: ±. ° .XXX ±. .010

NOTED THE INFORMATION AND DESIGN IN THIS DRAWING IS THE PROPERTY OF POLYPHASER CORP. ALL RIGHTS RESERVED.

THIRD-ANGLE PROJECTION

U.S. PATENT 9,785,110

400MHZ-1200MHZ BROADBAND

CGXJ+36NFNF-A

PolyPhaser

400MHZ-1200MHZ BROADBAND

SIZE A

CAGE 30992

PROD CAT RFP

DRAWING NUMBER CGXJ+36NFNF-A

REV A

SHEET 1 of 1

SCALE 2:3

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.